


- Compact power units
- Cooling radiator and fan
- Electronic Governor
- Electric starter & charge alternator
- GM four cycle , Water cooled , 1500 rpm diesel engine
- Normal duty,dry type air filter
- Single bearing alternator n, IP21 , class H insulation
- Standard voltage 400/230 V,50 Hz

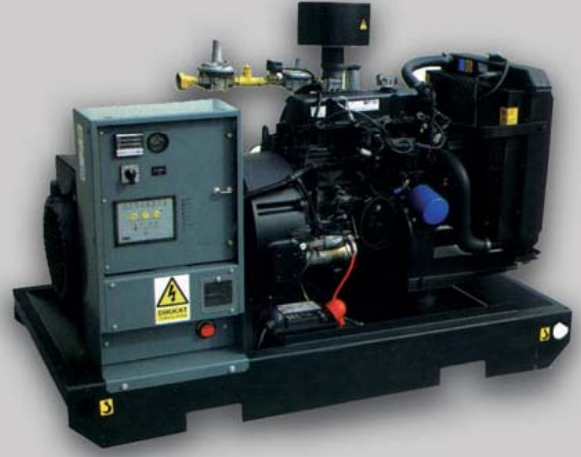

Model	Standby		Prime		Engine					Dimention			Dry weight
	KVA	KW	KVA	KW	Type	Kwm _(st)	Cyl	Bore	Stroke	L	W	H	Kg
GenSet													
GM 25	25	20	22	18	430	23	4L	102	91	1.6	0.85	1.2	1050
GM 40	40	32	36	29	643	36	6v	102	88	1.9	0.9	1.3	1125
GM 60	62	50	56	45	857	56	8v	102	88	2.5	1.1	1.4	1230
GM 80	82	65	72	58	881L	73	8v	108	111	2.5	1.1	1.4	1300
GM 100	100	80	90	72	881CS	88	8v	108	111	2.5	1.1	1.4	1600
GM 125	125	100	112	90	881T	108	8v	108	111	2.5	1.1	1.4	2115